


INTELLIGENT TERMINAL

DIGITAL & ANALOG

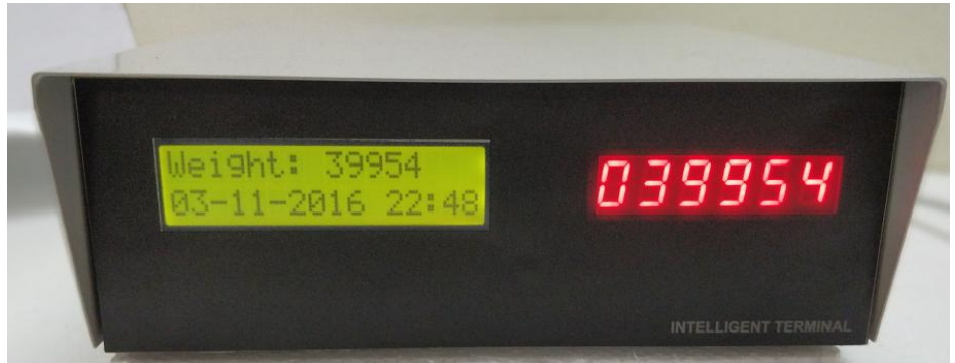

Feature

- Rugged and Robust design for use in any harsh environment
- ARM 32bit processor
- Processor clock frequency 1 GHz
- Real clock on board battery backed RTC
- Capable to store approximately 10 Lacks + weighment records
- SMPS power supply
- Input Voltage 90V to 260 V AC
- Support multiple Digital or Analog load cells
- No calibration required for Digital Load Cell
- Auto cornering provision for Digital Load cell
- 16 x 2 character LCD Display and 0.56" 6 digit 7 segment LED numeric Display
- 1.0" 6 digit 7 segment LED numeric Remote Display (optional)
- 4 USB ports for porting Keyboard, Converter Adapter for Load cell, Serial Adapter for GSM module (optional), Serial Adapter for Printer and USB for exporting data.
- External tare key provided for easy weight tare
- One time Dynamic password for Calibration & Configuration
- Various Reports (Current and or Historical) - Date wise, Vehicle wise, Party wise etc. can be generated, Printed
- Export data to external USB Key
- Current data can be read into Desktop Pc through RS232 port
- Friendly User Interfaces
- PC based software also available (optional)